

## MTH Accessory Wiring Connection

### INSTALLATION

Place in desired spot on layout.

### Wiring

**(A)** Connect Red wire to transformer AC and connect Black wire to activation button

**(B)** Connect Black wire to transformer ground

**(C)** Connect Black wire to activation button

**(D)** Connect Red wire to transformer AC

**(E)** Connect Black wire to transformer ground


Power input for action

Activate


Lights only

Activation Button

Accessory transformer

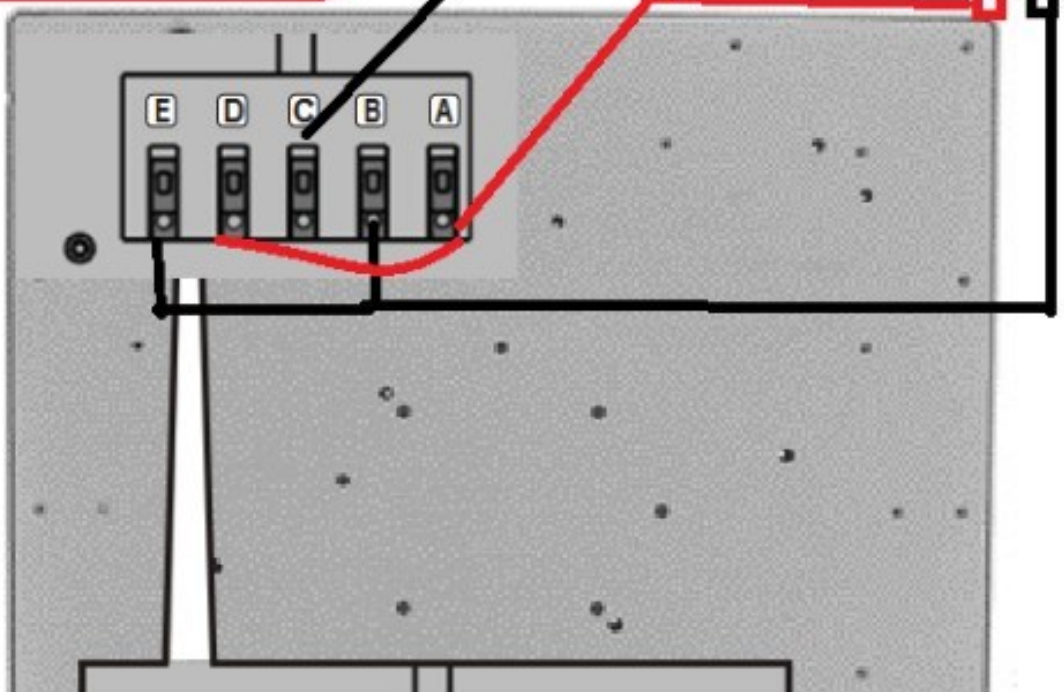

## MTH Accessory Wiring Connection

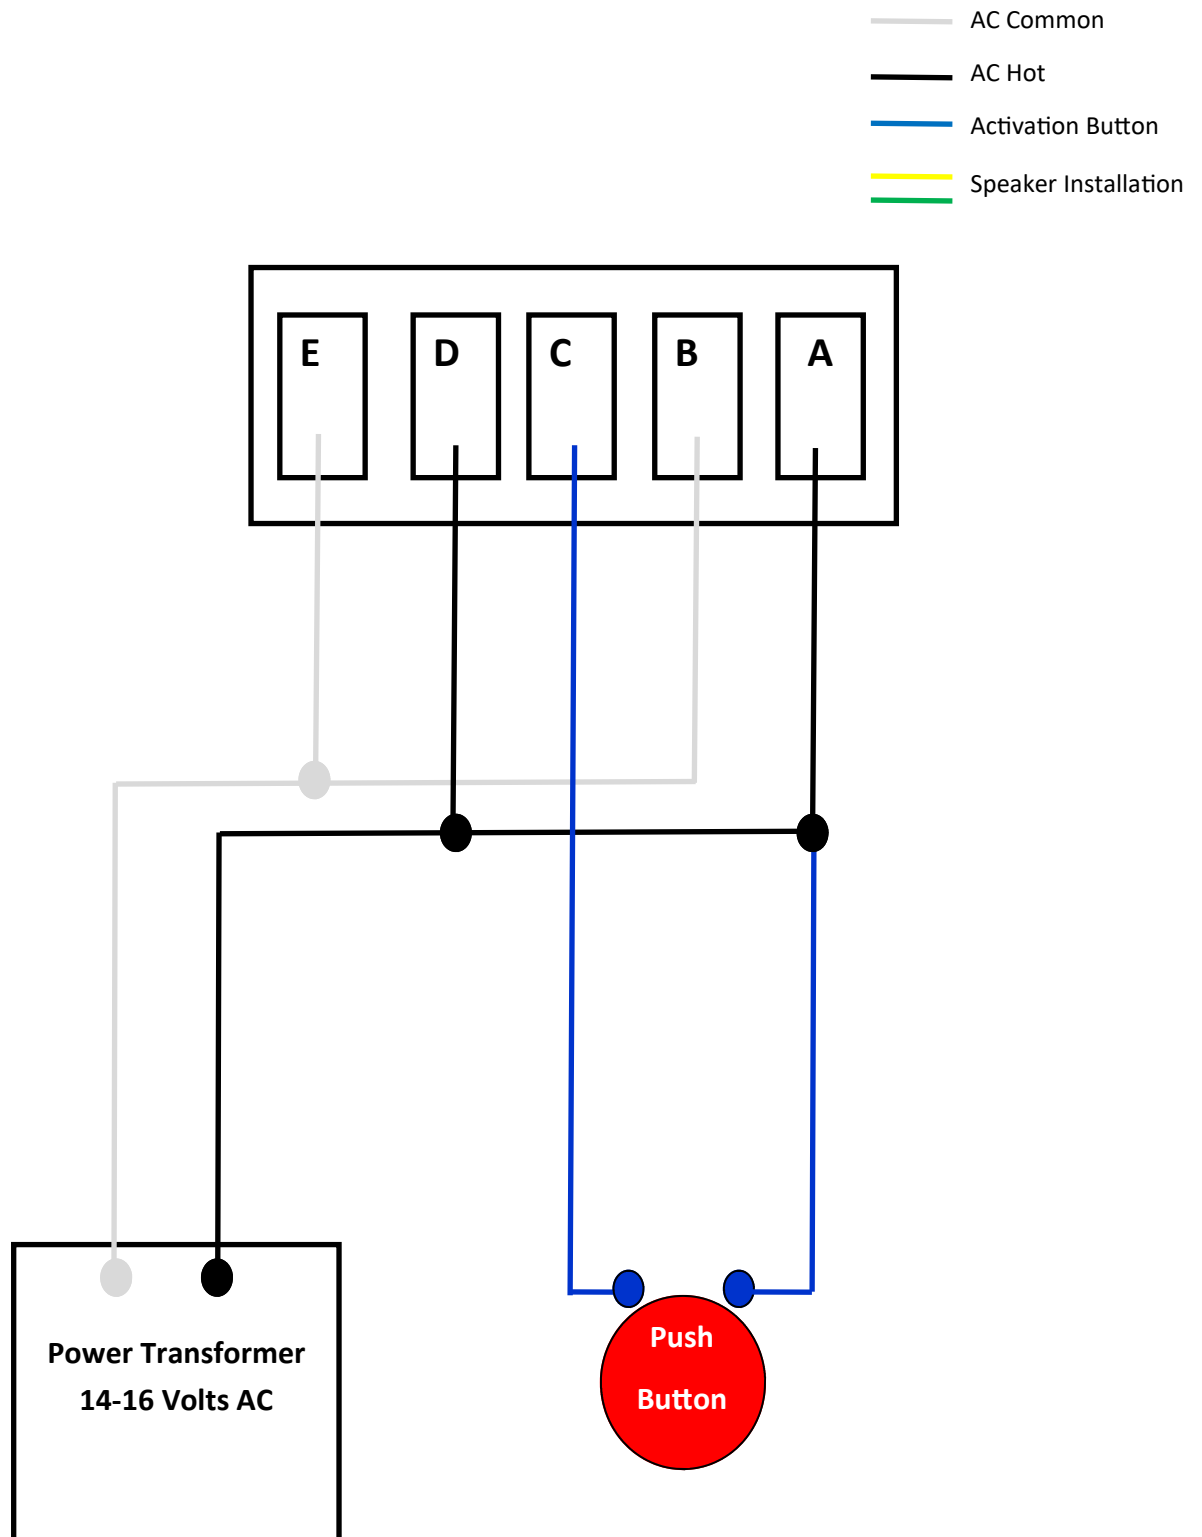

## Add an External Speaker

If there is a sound involved in the accessory then you can open the item to locate the speaker.

You will need to disconnect one speaker wire and run that wire to a single pole double throw switch.

Connect the disconnected wire to the center post the switch.

Then run a wire from one side of the switch to the original speaker.

Now you need to run from the other side of the switch a wire to an external speaker.

Attach another wire to the internal speaker wire that was not disconnected.

The there end you will need to attach to the external speaker.

